SEALED ENCLOSURES

with integrated wall mounting feets





These enclosures are designed to IP65 specifications and are ideal for use in the electrical and electronic industries for use where modern design is important. The moulded enclosures are offered in two different designs and a variety og colours.


The EURO version with designed curved lid and the ECO version with the classic flat lid. Both are available with label recess. The depth of the label recess fit a thin label (0,3 mm).

DESIGN FEATURES:

- * Cover screws are 1/4 turn stainless steel non-magnetic.
- * Wall mounting feet are integrated
- * The internal bosses for self tapping screws allow mounting of PCB horizontally or vertically.
- *The lid and base are fitted together with a tongue and groove sealing system with an gasket.
- Low cost black non UL and other colours are available.
- * NEW also available in black and white.

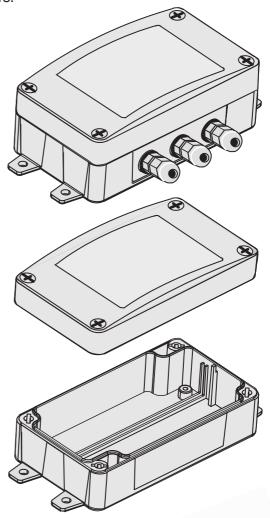





TECHNICAL DATA:

Material: ABS Standard (PC on request)
Colour: Grey, lid grey or transparent
(RAL 7035)

(RAL 7035) for 1/4 turn screws.

Temperature: Sealing: (IP 67 on request) Selfextinguishing: - 40 - +75 C (-40 - +95 C) IP65 IEC529 (Dust and hoseproof) Acc. to UL94-VO

	SERIES 200 1/4 TURN			External Dimensions / See Specifications				
Туре	Grey/Grey ABS	Clear/Grey ABS	Remarks	L = Length	W = Width	H = Height	Α	В
203 Euro-F	2069203731	2069203732	Recess 0,3	115	65	40	25	15
203 ECO-F	2069203741	2069203742	without recess	115	65	40	25	15

Many more p/n available - please inquire

• All measurements are in mm.